

Installation


XP-WPCDMD-CTRL

— **Installation Time:** About 20 Minutes

— **Tools Required:** 1/4" Nut-driver, Phillips screwdriver

1. Unplug the AC power from your pinball machine. Remove game backglass. Open back box.
2. Remove OEM WPC DMD Controller board
3. Install the XP-WPCDMD-CTRL in the back box
4. Connect all connectors as indicated. Make sure to connect all ribbon cables with proper Pin 1 orientation
5. Double-check all connections, plug in the machine, and turn the game on.
6. All systems should be operational! Play on!

Switch 1	Switch 2	Function
Off	Off	1x Scan Rate (Normal operation for Plasma Displays)
Off	On	2x Scan Rate
On	Off	3x Scan Rate
On	On	4x Scan Rate
Switch 3		
	Off	Normal Operation
	On	Debug Mode. Push SW2 to cycle through test Screens
Switch 4		
	Off	Reserved
	On	Reserved

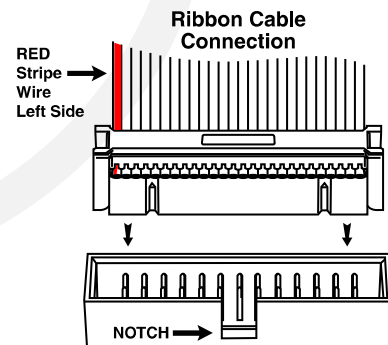

.....
EVOLUTION * EVOLVED.
